


Model 314CQ Butt Fusion Machine

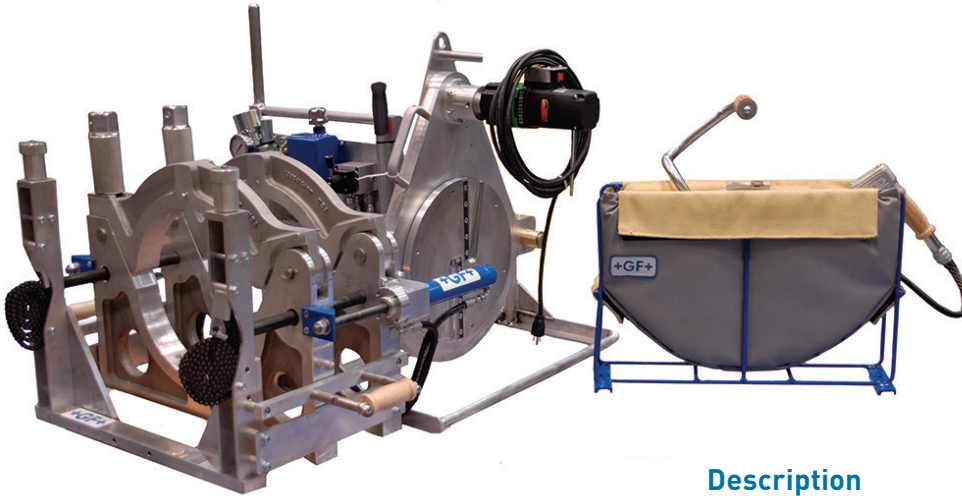

Specifications

Carriage Unit Dimensions

Length	25.00 inches	635 mm
Width	38.00 inches	965 mm
Height	24.70 inches	627 mm
Weight	172 pounds	78.0 kg
Total Weight	331 pounds	150.1 kg

Capacities

model 314CQ 3 inch IPS thru 14 inch IPS*
 model 314CQ -355 mm 90 mm thru 355 mm*

Electrical Data

120 VAC Single Phase	Watts	Amps
Facer Motor	1,200	10.0
Heater	2,500	20.8
Total Power Consumption	3,700	30.8
240 VAC Single Phase	Watts	Amps
Facer Motor	1,152	4.8
Heater	2,500	10.4
Total Power Consumption	3,652	15.2

*with the use of optional reducing inserts

Specifications are subject to change without notice.

Description

The 314CQ is a lightweight machine, designed for close quarters, that offers the user easy in-the-ditch access. Its ball bearing facer is powered by a durable electric motor. Like all machines from GFPC, it is easy to learn and operate, and you can expect low maintenance costs and a rapid return on your investment.

Features

- Integrated side fusion adapter makes this the ideal unit for in-the-ditch taps.
- Quick disconnect hydraulic hoses add convenience and versatility.
- Pressure gauge for excellent control of fusion pressures.
- System has 3,976 pounds of total interfacial force to handle any job.
- Ported for the DataConnect or other competitive data recorders.
- Rugged design with no "bells and whistles" means less maintenance expense.
- A superior piece of equipment at an extraordinary price.
- Limited three-year warranty.

Accessories

We offer a complete range of accessories for the 314CQ. Ask about reducing and mitered inserts, (available in IPS, DIPS and metric) and stub end holder.