


model 28IP butt fusion machine



description

The 28IP is a specialized Connectra machine, designed for fusing arctic and other types of insulated pipe in close quarters. It will fuse pipe with 18 inches of insulation jacket and a ten inch cutback. If the cutback is increased to 14 inches, the 28IP can fuse pipe with an unlimited thickness of insulation. Built with the same ruggedness of all Connectra machines, it is easy to learn and operate. And like all Connectra machines you can expect low maintenance costs and a rapid return on your investment.

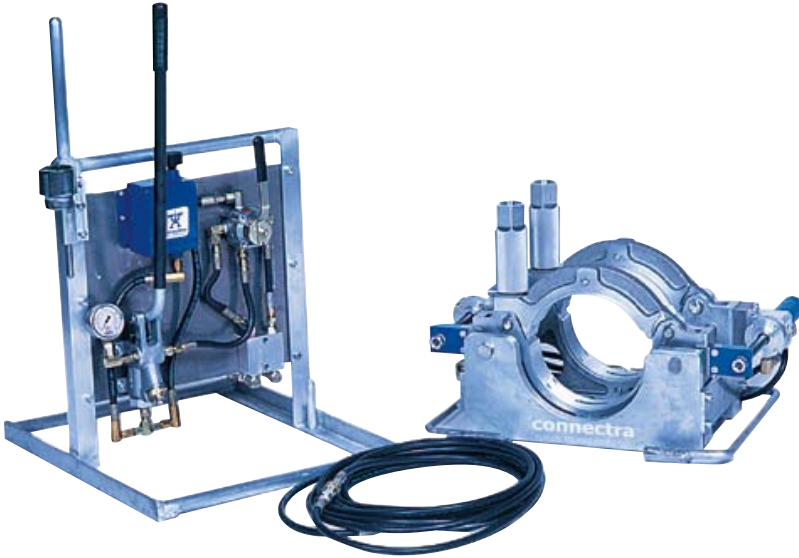

specifications

carriage unit dimensions

Length	20.50 inches	520 mm
Width	25.50 inches	648 mm
Height	17.30 inches	439 mm
Weight	93 pounds	42.2 kg
Total Weight (all components)	227 pounds	102.9 kg

capacities

model 28IP 2 inch IPS thru 8 inch DIPS*

model 28IP-225 mm 63 mm thru 225 mm*

electrical data

120 VAC Single Phase

	Watts	Amps
Facer Motor	1,200	10.0
Heater	2,000	16.6
Total Power Consumption	3,200	26.6

240 VAC Single Phase

	Watts	Amps
Facer Motor	1,152	4.8
Heater	2,000	8.3
Total Power Consumption	3,152	13.1

*with the use of optional reducing inserts

*Specifications are subject to change without notice.



features

- ★ Angled facer motor compensates for pipe eccentricity.
- ★ Two-clamp, lightweight design allows easy, in-the-ditch access.
- ★ Quick disconnect hoses add convenience and versatility.
- ★ Manual hydraulic pump with pressure gauge offers excellent control of fusion pressures.
- ★ Rugged design with no "bells and whistles" means less maintenance expense.
- ★ A superior piece of equipment at an extraordinary price.
- ★ Limited three-year warranty.



accessories

We offer a complete range of accessories for the 28IP. Ask about reducing and mitered inserts, (available in IPS, DIPS and metric), and stub end holder.